



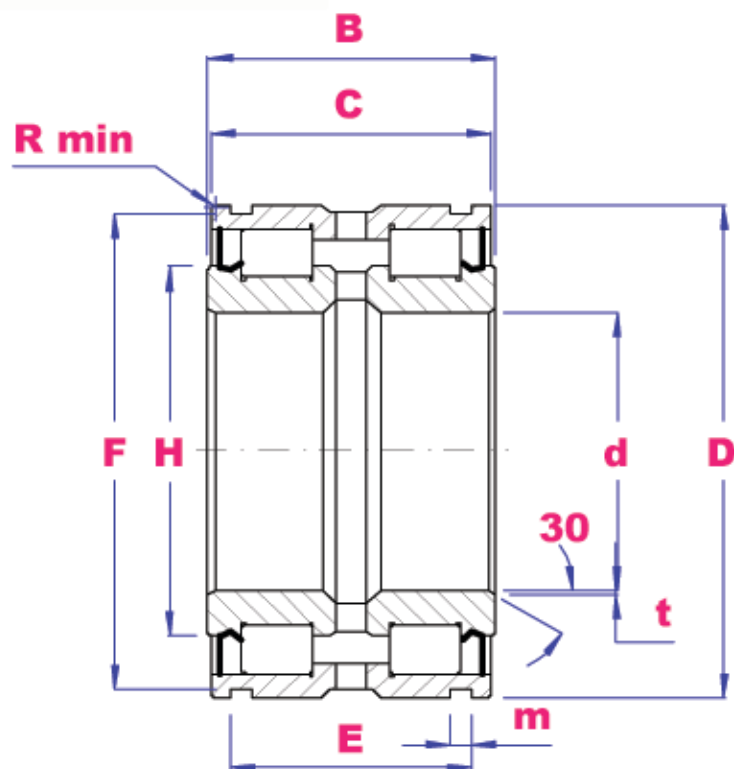

PART NO	d	D	B	C	E	F	m	r min	t	G WRE	G STW	H	D kN	S kN	Rpm max	ring	Wgt kg
SL04-5004PP	20	42	30	29	24.7	39.8	1.8	0.3	0.5	21.5	21	31	41.5	50	8500	42	0.202
SL04-5005PP	25	47	30	29	24.7	44.8	1.8	0.3	0.5	21.5	21	35.5	45.5	59	7500	47	0.222
SL04-5006PP	30	55	34	33	28.2	52.8	2.1	0.3	0.5	25	24	41	52	69	6500	55	0.34
SL04-5007PP	35	62	36	35	30.2	59.8	2.1	0.3	0.5	27	26	46.5	65	90	5500	62	0.46
SL04-5008PP	40	68	38	37	32.2	65.8	2.7	0.6	0.8	28	27	51.5	82	113	5000	68	0.55
SL04-5009PP	45	75	40	39	34.2	72.8	2.7	0.6	0.8	30	29	57.5	98	141	4500	75	0.71
SL04-5010PP	50	80	40	39	34.2	77.8	2.7	0.6	0.8	30	29	62	103	154	4200	80	0.75
SL04-5011PP	55	90	46	45	40.2	87.4	3.2	0.6	1.0	35	34	69	118	180	3800	90	1.15
SL04-5012PP	60	95	46	45	40.2	92.4	3.2	0.6	1.0	35	34	74	123	195	3500	95	1.20
SL04-5013PP	65	100	46	45	40.2	97.4	3.2	0.6	1.0	35	34	79	128	209	3300	100	1.30
SL04-5014PP	70	110	54	53	48.2	107.1	4.2	0.6	1.0	43	40	85	172	270	3000	110	1.91
SL04-5015PP	75	115	54	53	48.2	112.1	4.2	0.6	1.0	43	40	90	198	305	2800	115	2.00
SL04-5016PP	80	125	60	59	54.2	122.1	4.2	0.6	1.5	49	46	97.5	206	335	2600	125	2.65
SL04-5017PP	85	130	60	59	54.2	127.1	4.2	0.6	1.5	49	46	104.5	215	360	2500	130	2.80
SL04-5018PP	90	140	67	66	59.2	137	4.2	0.6	1.5	54	51	109.5	310	520	2300	140	3.70
SL04-5019PP	95	145	67	66	59.2	142	4.2	0.6	1.5	54	51	113.5	315	540	2200	145	3.90
SL04-5020PP	100	150	67	66	59.2	147	4.2	0.6	1.5	54	51	118	330	550	2100	150	4.05
SL04-5022PP	110	170	80	79	70.2	167	4.2	0.6	1.8	65	62	132	395	680	1900	170	6.50
SL04-5024PP	120	180	80	79	71.2	176	4.2	0.6	1.8	65	63	141.5	410	740	1800	180	6.95
SL04-5026PP	130	200	95	94	83.2	196	4.2	0.6	1.8	77	75	157	550	980	1600	200	10.5
SL04-5028PP	140	210	95	94	83.2	206	5.2	0.6	1.8	77	73	165.5	630	1120	1500	210	11.1
SL04-5030PP	150	225	100	99	87.2	221	5.2	0.6	2.0	81	77	176	710	1270	1400	225	13.5
SL04-5032PP	160	240	109	108	95.2	236	5.2	0.6	2.0	89	85	189.5	740	1370	1300	240	16.5